


**TYPICAL BENCH LAYOUT
WITH EXISTING SIDEWALK**
NTS

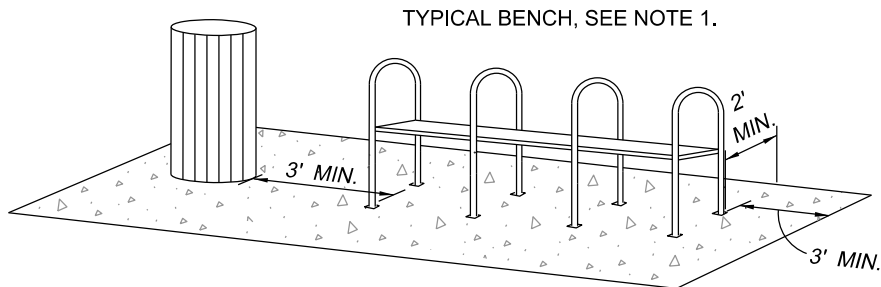

BENCH SCHEMATIC

NOTES:

1. BENCH STYLE SUBJECT TO CHANGE, COORDINATE WITH CITY.
2. BENCH SHOULD BE A MINIMUM OF 3' FROM THE SIDE OF THE CONCRETE PAD AND 2' FROM THE BACK EDGE OF THE CONCRETE PAD. COORDINATE LOCATION WITH THE CITY.
3. IF NO SIDEWALK CURRENTLY EXISTS, PROVIDE SIDEWALK TO NEAREST ADA ACCESSIBLE INTERSECTION OR DRIVEWAY WITH APPROPRIATE RAMPS.

CITY OF RALEIGH STANDARD DETAIL		
REVISIONS	DATE: 8/1/18	NOT TO SCALE
	SITE LAYOUT FOR BENCH	
	TT-05	